



## YOUR TRUSTED PARTNER IN MARINE & POWER GENERATION SOLUTIONS

Established in 1988, HSP Power Systems is a trusted Malaysia power solutions provider, delivering reliable and comprehensive solutions across generator sets, marine engines, rental power, data centre power systems, parts, and aftersales service support.



**POWER  
GENERATION**



**MARINE  
ENGINES**



**PARTS &  
SERVICES**



**DATA CENTRE  
PROJECTS**

## ABOUT HSP POWER SYSTEMS


HSP Power Systems provides integrated power generation and marine solutions for customers across Malaysia. From diesel generator set supply and system configuration to rental power, load testing, spare parts, filtration, and service support, we help customers maintain reliable operations with confidence.




## OUR NATIONWIDE FOOTPRINT

With strategic facilities across Penang, Kuala Lumpur, Johor, Sabah, and Sarawak, HSP is positioned to support customers through faster coordination, inventory access, and service response.

MAP OF  
MALAYSIA

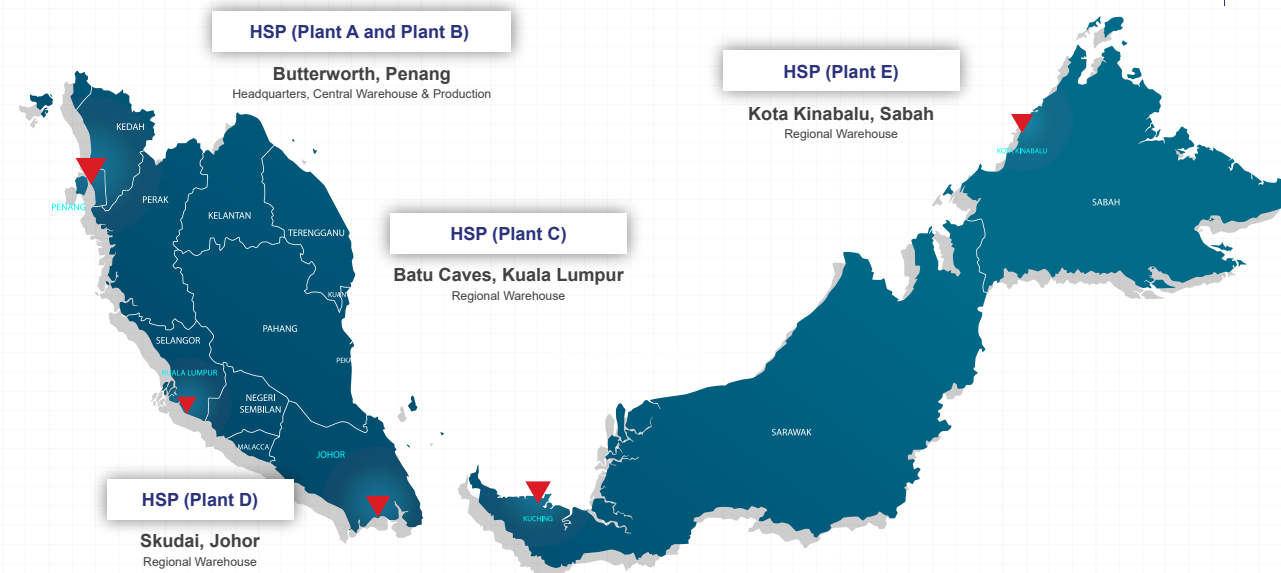

## WHY CHOOSE HSP

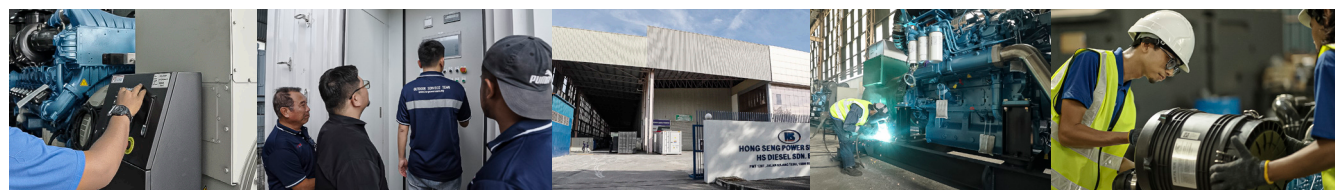

Integrated Power  
Solutions

Decades of Industry  
Experience

Nationwide  
Support Network

Strong Product  
Ecosystem

Parts and Service  
Support

## PROVEN POWER SOLUTIONS ACROSS INDUSTRIES

HSP supports industries where power reliability is critical to safety, productivity, and business continuity. From data centres and hospitals to industrial plants, commercial buildings, marine operations, and temporary power applications, our solutions are built to support dependable performance where continuity matters most.



Data Centres




Marine & Offshore



Infrastructure & Utilities



Healthcare



Commercial Buildings



Industrial &  
Manufacturing



Construction &  
Remote Sites



Telecommunications

## PT POWER GENSET APPLICATION



### Data Centre & Critical Infrastructure

- YTL Johor Data Center**
- 30 units x 3,000 kVA
  - 26 units x 1,500 kVA
  - Powered by Baudouin

- Micron Technology**
- 3 units x 2,000 kVA
  - Powered by Baudouin

- The Light City Plot A**
- 1 unit x 1,650 kVA
  - 3 units x 1,375 kVA
  - 1 unit x 750 kVA
  - Powered by Baudouin



### Healthcare & Commercial

- Island Hospital**
- 2 units x 1,750 kVA
  - Powered by Baudouin

- Hyatt Regency KL Midtown**
- 1 unit x 2,000 kVA
  - 1 unit x 750 kVA
  - Powered by Baudouin

- IOI City Mall Phase II**
- 4 units x 1,500 kVA
  - Powered by Baudouin



### Industrial & Utilities

- Sabah Electricity Sdn Bhd**
- 4 units x 250 kVA (Mobile Genset)
  - Powered by Cummins

- Taiyo Yuden Sarawak**
- 3 units x 750 kVA
  - 3 units x 400 kVA
  - Powered by Baudouin

- GCB Cocoa Grinding Factory**
- 6 units x 1,500 kVA
  - Powered by Cummins

# OUR PRODUCTS AND SOLUTIONS

HSP Power Systems provides integrated power solutions across power generation, marine, rental, data centres, parts, and related services. From generator set supply and temporary power to load testing, marine engines, and replacement parts, we help customers maintain reliability, performance, and operational continuity. As the authorised sole distributor of Baudouin G-Drive engines and an appointed Baudouin PowerKit OEM in Malaysia, HSP manufactures and distributes generator sets under the PT Power brand.

## A POWER GENERATION

Diesel generator sets are essential for standby, prime, and continuous power applications, especially in facilities where power interruption can affect safety, productivity, and operations.



**Open Type Generator Set**  
Rating Range: 15 kVA – 4,125 kVA



**Containerised Generator Set**  
Rating Range: 750 kVA – 4,125 kVA



**Truck-Mounted Generator Set**  
Available Ratings: 150 kVA, 500 kVA, 1,000 kVA, 1,500 kVA, 2,000 kVA



**Canopy Type Generator Set**  
Rating Range: 15 kVA – 750 kVA

## B RENTAL POWER & LOAD BANK

HSP provides rental generators and load banks for temporary power, testing, and commissioning needs, supporting project operations, maintenance, emergency backup, shutdowns, peak demand, synchronised generator setups, and load testing.



**Load Bank Solutions**  
Resistive and reactive load banks for testing & commissioning, performance verification, and preventive maintenance.



**Rental Generator Fleet**  
A total of 50+ MVA capacity, including 1,000 kVA, 1,500 kVA, and 2,000 kVA units

## C DATA CENTRE POWER SOLUTIONS


HSP supports data centre infrastructure with reliable backup power solutions for hyperscale facilities, colocation centres, server rooms, and other critical operations. Our solutions include diesel generators, containerised generators, load banks, and rental generators to support project delivery, commissioning, maintenance, peak demand, and unexpected power disruptions to help ensure uptime and operational continuity.




- Key Capabilities:**
- Generator Sets: 15 kVA – 4,125 kVA
  - Load Banks: 10 kW – 5,000 kW
  - Rental Fleet: 50+ MVA

## D MARINE SOLUTIONS


HSP provides marine power solutions for commercial vessels, workboats, fishing vessels, passenger vessels, offshore support vessels, and marine transportation. Through our exclusive distributorship of Weichai in Malaysia, we offer propulsion and auxiliary engines, marine gearboxes, and related solutions designed to support reliable vessel performance and long-term operation in demanding marine environments.

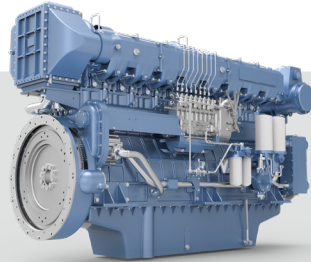

**Propulsion Engine**  
For vessel movement and main engine applications.  
  
Rating Range:  
34PS - 13,600PS  
Med to High speed

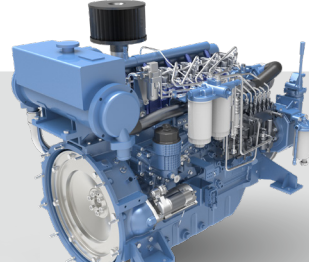

**Auxiliary Engine**  
For onboard power and vessel support systems.  
  
Rating Range:  
25kW - 10,000kW

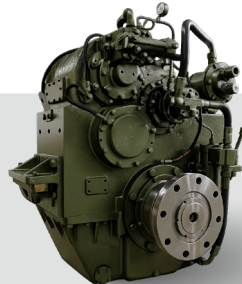

**Marine Gearbox**  
A complete range of marine gearboxes offering various capacities and reduction ratios to suit a wide range of marine propulsion applications.

## E PARTS & SERVICE

HSP provides aftermarket parts for diesel generator sets, heavy-duty engines, marine engines, and related power equipment. Our parts support helps customers reduce downtime, maintain equipment performance, and access suitable replacement components more efficiently. HSP carries over 40,000 SKUs across its inventory network to support faster parts availability and replacement needs.

Note: Parts compatibility may vary depending on engine model, alternator model, generator set rating, and application. Please contact HSP for confirmation before ordering.

POWERED BY  
BAUDOUIN ENGINE



PT Power's Diesel Generator Set Models (Powered by BAUDOUIN Engine) Models Offered As of 2026-09

| Line | Genset Model | Engine Made | Engine Model | Rating, 50HZ, 1500 RPM |               | Approximate Dimension, Open |       |         |          | Approximate Dimension, Canopy |       |        |          |
|------|--------------|-------------|--------------|------------------------|---------------|-----------------------------|-------|---------|----------|-------------------------------|-------|--------|----------|
|      |              |             |              | Prime                  | Standby       | Length                      | Width | Height  | Weight   | Length                        | Width | Height | Weight   |
|      |              |             |              | KW / KVA               | KW / KVA      | cm                          | cm    | cm      | kg       | cm                            | cm    | cm     | kg       |
| 1    | PT15-4M06    | BAUDOUIN    | 4M06G20/5    | 12 / 15                | 13.2 / 16.5   | 140.0                       | 62.0  | 95.8    | 630.0    | 183.3                         | 85.0  | 114.7  | 950.0    |
| 2    | PT18-4M06    | BAUDOUIN    | 4M06G20/5    | 15 / 18                | 15.8 / 19.8   | 140.0                       | 62.0  | 95.8    | 630.0    | 183.3                         | 85.0  | 114.7  | 950.0    |
| 3    | PT20-4M06    | BAUDOUIN    | 4M06G25/5    | 16 / 20                | 17.6 / 22     | 140.0                       | 62.0  | 95.8    | 650.0    | 183.3                         | 85.0  | 114.7  | 950.0    |
| 4    | PT23-4M06    | BAUDOUIN    | 4M06G25/5    | 18 / 23                | 20 / 25       | 140.0                       | 62.0  | 95.8    | 650.0    | 183.3                         | 85.0  | 114.7  | 950.0    |
| 5    | PT25-4M06    | BAUDOUIN    | 4M06G35/5    | 20 / 25                | 22 / 27.5     | 140.0                       | 62.0  | 95.8    | 680.0    | 183.3                         | 85.0  | 114.7  | 950.0    |
| 6    | PT30-4M06    | BAUDOUIN    | 4M06G35/5    | 24 / 30                | 26.4 / 33     | 149.2                       | 62.0  | 95.8    | 700.0    | 183.3                         | 85.0  | 114.7  | 950.0    |
| 7    | PT32-4M06    | BAUDOUIN    | 4M06G35/5    | 26 / 32                | 28 / 35       | 149.2                       | 62.0  | 95.8    | 700.0    | 183.3                         | 85.0  | 114.7  | 950.0    |
| 8    | PT40-4M06    | BAUDOUIN    | 4M06G44/5    | 32 / 40                | 35 / 44       | 151.2                       | 62.0  | 95.8    | 730.0    | 197.0                         | 91.0  | 122.7  | 1,050.0  |
| 9    | PT45-4M06    | BAUDOUIN    | 4M06G50/5    | 36 / 45                | 39.6 / 49.5   | 160.2                       | 62.0  | 95.8    | 750.0    | 217.0                         | 95.0  | 130.3  | 1,100.0  |
| 10   | PT50-4M06    | BAUDOUIN    | 4M06G55/5    | 40 / 50                | 44 / 55       | 160.2                       | 62.0  | 95.8    | 750.0    | 217.0                         | 95.0  | 130.3  | 1,100.0  |
| 11   | PT60-4M10    | BAUDOUIN    | 4M10G70/5    | 48 / 60                | 52.8 / 66     | 177.1                       | 71.1  | 107.6   | 1,020.0  | 255.0                         | 105.6 | 125.2  | 1,550.0  |
| 12   | PT65-4M10    | BAUDOUIN    | 4M10G70/5    | 52 / 65                | 57.5 / 71.5   | 177.1                       | 71.1  | 107.6   | 1,020.0  | 255.0                         | 105.6 | 125.2  | 1,550.0  |
| 13   | PT80-4M10    | BAUDOUIN    | 4M10G88/5    | 64 / 80                | 70.4 / 88     | 177.1                       | 71.1  | 107.6   | 1,050.0  | 255.0                         | 105.6 | 125.2  | 1,600.0  |
| 14   | PT100-4M10   | BAUDOUIN    | 4M10G110/5   | 80 / 100               | 88 / 110      | 184.6                       | 76.0  | 116.8   | 1,200.0  | 284.7                         | 110.6 | 143.1  | 1,700.0  |
| 15   | PT135-6M11   | BAUDOUIN    | 6M11G150/5   | 108 / 135              | 118.8 / 148.5 | 232.5                       | 86.0  | 126.7   | 1,500.0  | 355.0                         | 128.0 | 165.2  | 2,050.0  |
| 16   | PT150-6M11   | BAUDOUIN    | 6M11G165/5   | 120 / 150              | 132 / 165     | 244.2                       | 86.0  | 126.7   | 1,600.0  | 355.0                         | 128.0 | 165.2  | 2,180.0  |
| 17   | PT200-6M16   | BAUDOUIN    | 6M16G220/5   | 160 / 200              | 176 / 220     | 264.6                       | 107.0 | 147.2   | 2,030.0  | 372.0                         | 135.0 | 180.2  | 2,600.0  |
| 18   | PT225-6M16   | BAUDOUIN    | 6M16G250/5   | 180 / 225              | 198 / 247.5   | 264.6                       | 107.0 | 147.2   | 2,030.0  | 372.0                         | 135.0 | 180.2  | 2,600.0  |
| 19   | PT230-6M16   | BAUDOUIN    | 6M16G250/5   | 184 / 230              | 202.4 / 253   | 264.6                       | 107.0 | 147.2   | 2,060.0  | 372.0                         | 135.0 | 180.2  | 2,630.0  |
| 20   | PT250-6M16   | BAUDOUIN    | 6M16G275/5   | 200 / 250              | 220 / 275     | 267.6                       | 107.0 | 147.2   | 2,180.0  | 391.2                         | 135.8 | 175.2  | 2,752.0  |
| 21   | PT300-6M16   | BAUDOUIN    | 6M16G350/5   | 240 / 300              | 264 / 330     | 288.0                       | 107.0 | 147.2   | 2,300.0  | 391.2                         | 135.8 | 175.2  | 2,865.0  |
| 22   | PT320-6M16   | BAUDOUIN    | 6M16G350/5   | 256 / 320              | 280 / 350     | 288.0                       | 107.0 | 147.2   | 2,385.0  | 391.2                         | 135.8 | 175.2  | 2,950.0  |
| 23   | PT350-6M21   | BAUDOUIN    | 6M21G400/5   | 280 / 350              | 308 / 385     | 288.0                       | 116.0 | 154.8   | 2,650.0  | 426.4                         | 152.8 | 223.3  | 3,300.0  |
| 24   | PT400-6M21   | BAUDOUIN    | 6M21G440/5   | 320 / 400              | 352 / 440     | 288.0                       | 116.0 | 154.8   | 2,800.0  | 426.4                         | 152.8 | 223.3  | 3,430.0  |
| 25   | PT450-6M21   | BAUDOUIN    | 6M21G500/5   | 360 / 450              | 396 / 495     | 288.0                       | 118.0 | 156.3   | 2,850.0  | 426.4                         | 152.8 | 223.3  | 3,550.0  |
| 26   | PT500-6M21   | BAUDOUIN    | 6M21G550/5   | 400 / 500              | 440 / 550     | 296.9                       | 118.0 | 170.0   | 3,000.0  | 426.4                         | 152.8 | 223.3  | 3,650.0  |
| 27   | PT600-6M33   | BAUDOUIN    | 6M33G660/5   | 480 / 600              | 528 / 660     | 361.6                       | 170.3 | 214.5   | 4,300.0  | 548.0                         | 200.0 | 250.0  | 5,500.0  |
| 28   | PT600-8M21   | BAUDOUIN    | 8M21G660/5   | 480 / 600              | 528 / 660     | 302.8                       | 136.0 | 176.4   | 3,450.0  | 426.4                         | 152.8 | 223.3  | 4,400.0  |
| 29   | PT650-6M33   | BAUDOUIN    | 6M33G715/5   | 520 / 650              | 572 / 715     | 378.6                       | 170.3 | 214.5   | 4,500.0  | 548.0                         | 200.0 | 250.0  | 5,500.0  |
| 30   | PT680-6M31   | BAUDOUIN    | 6M31G750/5   | 544 / 680              | 598.4 / 748   | 367.6                       | 140.0 | 199.2   | 4,000.0  | 490.0                         | 170.0 | 238.0  | 4,800.0  |
| 31   | PT680-6M33   | BAUDOUIN    | 6M33G750/5   | 544 / 680              | 598.4 / 748   | 378.6                       | 170.3 | 214.5   | 4,600.0  | 548.0                         | 200.0 | 250.0  | 5,600.0  |
| 32   | PT700-6M33   | BAUDOUIN    | 6M33G750/5   | 560 / 700              | 616 / 770     | 378.6                       | 170.3 | 4,600.0 | 4,700.0  | 548.0                         | 200.0 | 250.0  | 5,600.0  |
| 33   | PT750-6M31   | BAUDOUIN    | 6M31G825/5   | 600 / 750              | 660 / 825     | 367.6                       | 140.0 | 199.2   | 4,100.0  | 490.0                         | 170.0 | 238.0  | 4,900.0  |
| 34   | PT750-6M33   | BAUDOUIN    | 6M33G825/5   | 600 / 750              | 660 / 825     | 378.6                       | 170.3 | 214.5   | 4,800.0  | 548.0                         | 200.0 | 250.0  | 5,700.0  |
| 35   | PT800-6M31   | BAUDOUIN    | 6M31G900/5   | 640 / 800              | 704 / 880     | 367.6                       | 140.0 | 199.2   | 4,300.0  | 548.0                         | 200.0 | 250.0  | 5,200.0  |
| 36   | PT800-8M33   | BAUDOUIN    | 8M33G900/5   | 640 / 800              | 704 / 880     | 391.5                       | 177.9 | 226.9   | 6,000.0  | 548.0                         | 200.0 | 250.0  | 6,900.0  |
| 37   | PT800-12M26  | BAUDOUIN    | 12M26G900/5  | 640 / 800              | 704 / 880     | 427.0                       | 175.6 | 239.5   | 7,000.0  | 609.6                         | 243.8 | 289.6  | 10,300.0 |
| 38   | PT900-8M33   | BAUDOUIN    | 8M33G1000/5  | 720 / 900              | 792 / 990     | 391.5                       | 177.9 | 226.9   | 6,300.0  | 548.0                         | 200.0 | 250.0  | 7,300.0  |
| 39   | PT900-12M26  | BAUDOUIN    | 12M26G1000/5 | 720 / 900              | 792 / 990     | 427.0                       | 175.6 | 239.5   | 8,000.0  | 609.6                         | 243.8 | 289.6  | 10,600.0 |
| 40   | PT1000-8M33  | BAUDOUIN    | 8M33G1100/5  | 800 / 1000             | 880 / 1100    | 391.5                       | 177.9 | 226.9   | 6,550.0  | 548.0                         | 200.0 | 250.0  | 9,550.0  |
| 41   | PT1000-12M26 | BAUDOUIN    | 12M26G1100/5 | 800 / 1000             | 880 / 1100    | 437.5                       | 175.6 | 234.3   | 6,750.0  | 609.6                         | 243.8 | 289.6  | 10,800.0 |
| 42   | PT1150-12M33 | BAUDOUIN    | 12M33G1250/5 | 920 / 1150             | 1012 / 1265   | 474.6                       | 215.8 | 251.2   | 8,450.0  | 609.6                         | 243.8 | 289.6  | 12,500.0 |
| 43   | PT1250-12M33 | BAUDOUIN    | 12M33G1400/5 | 1000 / 1250            | 1100 / 1375   | 477.6                       | 215.8 | 251.2   | 8,600.0  | 609.6                         | 243.8 | 289.6  | 12,500.0 |
| 44   | PT1375-12M33 | BAUDOUIN    | 12M33G1500/5 | 1100 / 1375            | 1210 / 1512.5 | 477.6                       | 215.8 | 251.2   | 8,800.0  | 609.6                         | 243.8 | 289.6  | 12,800.0 |
| 45   | PT1500-12M33 | BAUDOUIN    | 12M33G1650/5 | 1200 / 1500            | 1320 / 1650   | 477.6                       | 215.8 | 253.2   | 9,000.0  | 609.6                         | 243.8 | 289.6  | 13,000.0 |
| 46   | PT1650-16M33 | BAUDOUIN    | 16M33G1900/5 | 1320 / 1650            | 1452 / 1815   | 569.0                       | 222.4 | 274.1   | 11,300.0 | 900.0                         | 252.0 | 310.0  | 15,000.0 |
| 47   | PT1750-16M33 | BAUDOUIN    | 16M33G1900/5 | 1400 / 1750            | 1540 / 1925   | 569.0                       | 222.4 | 274.1   | 11,500.0 | 900.0                         | 252.0 | 310.0  | 15,200.0 |
| 48   | PT1830-16M33 | BAUDOUIN    | 16M33G2000/5 | 1464 / 1830            | 1610.4 / 2013 | 569.0                       | 222.4 | 274.1   | 11,900.0 | 900.0                         | 252.0 | 310.0  | 16,200.0 |
| 49   | PT2000-16M33 | BAUDOUIN    | 16M33G2250/5 | 1600 / 2000            | 1760 / 2200   | 596.9                       | 276.4 | 320.0   | 12,500.0 | 1,219.2                       | 320.0 | 360.0  | 18,000.0 |
| 50   | PT2250-20M33 | BAUDOUIN    | 20M33G2500/5 | 1800 / 2250            | 1980 / 2475   | 640.0                       | 279.0 | 318.4   | 15,000.0 | 1,219.2                       | 320.0 | 360.0  | 20,000.0 |
| 51   | PT2500-20M33 | BAUDOUIN    | 20M33G2750/5 | 2000 / 2500            | 2200 / 2750   | 640.0                       | 279.0 | 318.4   | 16,900.0 | 1,415.0                       | 320.0 | 385.0  | 20,600.0 |
| 52   | PT2500-12M55 | BAUDOUIN    | 12M55G2750/5 | 2000 / 2500            | 2200 / 2750   | 707.0                       | 268.0 | 282.3   | 21,000.0 | 1,415.0                       | 320.0 | 385.0  | 35,000.0 |
| 53   | PT2750-12M55 | BAUDOUIN    | 12M55G3000/5 | 2200 / 2750            | 2420 / 3025   | 707.0                       | 268.0 | 282.3   | 21,500.0 | 1,415.0                       | 320.0 | 385.0  | 34,500.0 |
| 54   | PT3000-16M55 | BAUDOUIN    | 16M55G3300/5 | 2400 / 3000            | 2640 / 3300   | 791.0                       | 300.0 | 376.0   | 26,900.0 | 1,800.0                       | 320.0 | 385.0  | 42,000.0 |
| 55   | PT3250-16M55 | BAUDOUIN    | 16M55G3750/5 | 2600 / 3250            | 2860 / 3575   | 791.0                       | 300.0 | 376.0   | 26,900.0 | 1,800.0                       | 320.0 | 385.0  | 43,000.0 |
| 56   | PT3500-16M55 | BAUDOUIN    | 16M55G4000/5 | 2800 / 3500            | 3080 / 3850   | 791.0                       | 300.0 | 376.0   | 26,900.0 | 1,800.0                       | 320.0 | 385.0  | 45,000.0 |
| 57   | PT3750-16M55 | BAUDOUIN    | 16M55G4000/5 | 3000 / 3750            | 3300 / 4125   | 791.0                       | 300.0 | 376.0   | 26,900.0 | 1,800.0                       | 320.0 | 385.0  | 48,000.0 |

Validity: Subject to change without notice Delivery: 10 to 12 weeks from date of order

Remark: Dimensions & weight may change from time to time

POWERED BY  
CUMMINS ENGINE

PT Power's Diesel Generator Set Models (Powered by CUMMINS Engine) Models Offered As of 2026-09

| Line | Genset Model | Engine Made | Engine Model | Rating, 50HZ, 1500 RPM |                | Approximate Dimension, Open |       |        |          | Approximate Dimension, Canopy |       |        |          |
|------|--------------|-------------|--------------|------------------------|----------------|-----------------------------|-------|--------|----------|-------------------------------|-------|--------|----------|
|      |              |             |              | Prime                  | Standby        | Length                      | Width | Height | Weight   | Length                        | Width | Height | Weight   |
|      |              |             |              | KW / KVA               | KW / KVA       |                             |       |        |          |                               |       |        |          |
| 1    | PT20BDF      | CUMMINS     | 4B3.9G11     | 16 / 20                | 17.6 / 22      | 158.0                       | 66.2  | 107.3  | 700.0    | 227.2                         | 101.0 | 130.8  | 1,600.0  |
| 2    | PT25BDF-1    | CUMMINS     | 4B3.9G1      | 20 / 25                | 22 / 27.5      | 158.0                       | 66.2  | 107.3  | 750.0    | 227.2                         | 101.0 | 130.8  | 1,600.0  |
| 3    | PT25BDF-2    | CUMMINS     | 4B3.9G2      | 20 / 25                | 22 / 27.5      | 158.0                       | 66.2  | 107.3  | 750.0    | 227.2                         | 101.0 | 130.8  | 1,600.0  |
| 4    | PT30BDF-1    | CUMMINS     | 4BT3.9G1     | 24 / 30                | 26.4 / 33      | 160.0                       | 66.2  | 107.3  | 780.0    | 227.2                         | 101.0 | 130.8  | 1,800.0  |
| 5    | PT30BDF-2    | CUMMINS     | 4BT3.9G2     | 24 / 30                | 26.4 / 33      | 160.0                       | 66.2  | 107.3  | 780.0    | 227.2                         | 101.0 | 130.8  | 1,800.0  |
| 6    | PT40BDF-1    | CUMMINS     | 4BT3.9G1     | 32 / 40                | 35.2 / 44      | 163.0                       | 66.2  | 106.7  | 780.0    | 246.0                         | 91.0  | 125.0  | 1,700.0  |
| 7    | PT40BDF-2    | CUMMINS     | 4BT3.9G2     | 32 / 40                | 35.2 / 44      | 163.0                       | 66.2  | 106.7  | 780.0    | 246.0                         | 91.0  | 125.0  | 1,700.0  |
| 8    | PT50BDF      | CUMMINS     | 4BTA3.9G2    | 40 / 50                | 44 / 55        | 178.8                       | 66.2  | 111.4  | 870.0    | 246.0                         | 91.0  | 125.0  | 1,700.0  |
| 9    | PT60BDF      | CUMMINS     | 4BTA3.9G2    | 48 / 60                | 52.8 / 66      | 187.6                       | 66.2  | 111.4  | 870.0    | 246.0                         | 91.0  | 125.0  | 1,730.0  |
| 10   | PT75-4BDF    | CUMMINS     | 4BTA3.9G11   | 60 / 75                | 66 / 82.5      | 187.6                       | 66.2  | 111.4  | 960.0    | 286.0                         | 110.0 | 147.0  | 1,900.0  |
| 11   | PT75-6BDF-1  | CUMMINS     | 6BT5.9G1     | 60 / 75                | 66 / 82.5      | 187.6                       | 66.2  | 111.4  | 960.0    | 286.0                         | 110.0 | 147.0  | 1,900.0  |
| 12   | PT75-6BDF-2  | CUMMINS     | 6BT5.9G2     | 60 / 75                | 66 / 82.5      | 193.4                       | 193.4 | 193.4  | 960.0    | 286.0                         | 110.0 | 147.0  | 1,900.0  |
| 13   | PT75-4BDF    | CUMMINS     | 4BTA3.9G11   | 60 / 75                | 66 / 82.5      | 193.4                       | 193.4 | 193.4  | 960.0    | 286.0                         | 110.0 | 147.0  | 1,900.0  |
| 14   | PT80-4BDF    | CUMMINS     | 4BTA3.9G11   | 64 / 80                | 70.4 / 88      | 193.4                       | 74.2  | 116.6  | 960.0    | 286.0                         | 110.0 | 147.0  | 1,900.0  |
| 15   | PT80-6BDF-1  | CUMMINS     | 6BT5.9G1     | 64 / 80                | 70.4 / 88      | 211.4                       | 74.2  | 117.9  | 960.0    | 286.0                         | 110.0 | 147.0  | 1,900.0  |
| 16   | PT80-6BDF-2  | CUMMINS     | 6BT5.9G2     | 64 / 80                | 70.4 / 88      | 211.4                       | 74.2  | 117.9  | 960.0    | 286.0                         | 110.0 | 147.0  | 1,900.0  |
| 17   | PT100BDF-1   | CUMMINS     | 6BT5.9G1     | 80 / 100               | 88 / 110       | 211.4                       | 74.2  | 117.9  | 960.0    | 284.0                         | 100.0 | 130.0  | 1,900.0  |
| 18   | PT100BDF-2   | CUMMINS     | 6BT5.9G2     | 80 / 100               | 88 / 110       | 211.4                       | 74.2  | 117.9  | 960.0    | 284.0                         | 100.0 | 130.0  | 1,900.0  |
| 19   | PT125BDF     | CUMMINS     | 6BTAAs.9G2   | 100 / 125              | 110 / 137.5    | 228.1                       | 74.2  | 120.9  | 980.0    | 267.0                         | 100.0 | 130.0  | 1,960.0  |
| 20   | PT125CDF     | CUMMINS     | 6CTA8.3G1    | 100 / 125              | 110 / 137.5    | 234.5                       | 79.2  | 127.8  | 1,400.0  | 335.0                         | 125.0 | 170.0  | 2,200.0  |
| 21   | PT150BDF     | CUMMINS     | 6BTAAs.9G12  | 120 / 150              | 132 / 165      | 232.1                       | 81.2  | 121.7  | 980.0    | 267.0                         | 100.0 | 130.0  | 1,960.0  |
| 22   | PT156CDF-1   | CUMMINS     | 6CTA8.3G1    | 124.8 / 156            | 137.3 / 171.6  | 234.5                       | 79.2  | 127.8  | 1,400.0  | 350.0                         | 125.0 | 170.0  | 2,300.0  |
| 23   | PT156CDF-2   | CUMMINS     | 6CTA8.3G2    | 125 / 156              | 137.3 / 171.6  | 234.5                       | 79.2  | 127.8  | 1,400.0  | 350.0                         | 125.0 | 170.0  | 2,300.0  |
| 24   | PT180CDF     | CUMMINS     | 6CTA8.3G2    | 125 / 156              | 137.3 / 171.6  | 242.3                       | 79.2  | 127.8  | 1,400.0  | 365.0                         | 130.0 | 180.0  | 2,300.0  |
| 25   | PT200CDF     | CUMMINS     | 6CTAAs.3G2   | 160 / 200              | 176 / 220      | 252.8                       | 95.8  | 137.3  | 1,400.0  | 365.0                         | 130.0 | 180.0  | 2,300.0  |
| 26   | PT225L8.9DF  | CUMMINS     | 6LTAA8.9G2   | 180 / 225              | 198 / 247.5    | 259.3                       | 95.7  | 150.9  | 2,500.0  | 403.6                         | 150.4 | 205.0  | 3,350.0  |
| 27   | PT250L8.9DF  | CUMMINS     | 6LTAA8.9G2   | 200 / 250              | 220 / 275      | 259.3                       | 95.7  | 150.9  | 2,500.0  | 403.6                         | 150.4 | 205.0  | 3,350.0  |
| 28   | PT250NCQP    | CUMMINS     | NT855GA      | 200 / 250              | 220 / 275      | 291.3                       | 101.0 | 168.7  | 2,650.0  | 328.0                         | 99.5  | 150.0  | 2,650.0  |
| 29   | PT250M11CQP  | CUMMINS     | MTA11G2      | 200 / 250              | 220 / 275      | 294.8                       | 111.0 | 151.9  | 2,650.0  | 403.6                         | 130.4 | 205.0  | 3,800.0  |
| 30   | PT275L9.5DF  | CUMMINS     | 6LTAA9.5G3   | 220 / 275              | 242 / 302.5    | 286.2                       | 112.0 | 158.0  | 2,500.0  | 403.6                         | 150.4 | 205.0  | 3,350.0  |
| 31   | PT300NCQP    | CUMMINS     | NTA855G1     | 240 / 300              | 264 / 330      | 311.0                       | 111.0 | 174.5  | 2,650.0  | 403.6                         | 150.4 | 205.0  | 4,250.0  |
| 32   | PT300M11CQP  | CUMMINS     | MTA11G3      | 240 / 300              | 264 / 330      | 299.6                       | 111.0 | 155.1  | 2,650.0  | 403.6                         | 152.4 | 205.0  | 4,250.0  |
| 33   | PT312NCQP    | CUMMINS     | NTA855G2     | 249.6 / 312            | 274.56 / 343.2 | 311.0                       | 111.0 | 173.8  | 2,650.0  | 440.0                         | 152.0 | 212.5  | 4,250.0  |
| 34   | PT350NCQP    | CUMMINS     | NTA855G4     | 280 / 350              | 308 / 385      | 311.0                       | 111.0 | 173.8  | 2,650.0  | 440.0                         | 150.0 | 212.5  | 4,250.0  |
| 35   | PT400QSZ     | CUMMINS     | QSZ13G7      | 320 / 400              | 352 / 440      | 317.0                       | 115.6 | 199.5  | 2,650.0  | 440.0                         | 152.0 | 212.5  | 4,250.0  |
| 36   | PT400NCQP    | CUMMINS     | NTAA855G7    | 320 / 400              | 352 / 440      | 323.4                       | 111.0 | 166.0  | 2,650.0  | 440.0                         | 152.0 | 212.5  | 4,250.0  |
| 37   | PT400KCQP    | CUMMINS     | KTA19G2      | 320 / 400              | 352 / 440      | 330.8                       | 131.8 | 193.8  | 3,575.0  | 490.0                         | 170.0 | 238.5  | 5,668.0  |
| 38   | PT400QSNT    | CUMMINS     | QSNT-G3      | 320 / 400              | 352 / 440      | 336.0                       | 111.0 | 166.0  | 2,650.0  | 440.0                         | 152.0 | 212.5  | 4,250.0  |
| 39   | PT450QSZ     | CUMMINS     | QSZ13G5      | 360 / 450              | 396 / 495      | 317.0                       | 115.6 | 199.5  | 3,300.0  | 455.8                         | 151.4 | 202.8  | 4,300.0  |
| 40   | PT450KCQP    | CUMMINS     | KTA19G3      | 360 / 450              | 396 / 495      | 342.9                       | 131.8 | 193.8  | 3,575.0  | 490.0                         | 170.0 | 238.5  | 5,668.0  |
| 41   | PT500QSZ     | CUMMINS     | QSZ13G10     | 400 / 500              | 440 / 550      | 321.7                       | 136.0 | 184.0  | 3,500.0  | 455.8                         | 151.4 | 202.8  | 4,500.0  |
| 42   | PT500KCQP    | CUMMINS     | KTA19G4      | 400 / 500              | 440 / 550      | 347.4                       | 131.8 | 193.8  | 3,575.0  | 490.0                         | 170.0 | 238.5  | 5,668.0  |
| 43   | PT600KCQP    | CUMMINS     | KTAA19G7 **  | 480 / 600              | 528 / 660      | 347.4                       | 131.8 | 193.8  | 3,600.0  | 490.0                         | 170.0 | 239.0  | 5,700.0  |
| 44   | PT625KCQP    | CUMMINS     | KTAA19G7 **  | 500 / 625              | 550 / 687.5    | 347.4                       | 131.8 | 193.8  | 3,600.0  | 490.0                         | 170.0 | 239.0  | 5,700.0  |
| 45   | PT650Q       | CUMMINS     | QSK19G4      | 520 / 650              | 572 / 715      | 369.5                       | 157.0 | 216.2  | 3,600.0  | 490.0                         | 170.0 | 239.0  | 5,500.0  |
| 46   | PT680KCQP    | CUMMINS     | KTAA19G7 **  | NA / NA                | 544 / 680      | 351.1                       | 143.0 | 206.5  | 3,700.0  | 490.0                         | 170.0 | 239.0  | 5,800.0  |
| 47   | PT725KCQP    | CUMMINS     | KT38GA       | 580 / 725              | 638 / 797.5    | 431.5                       | 170.6 | 247.4  | 7,872.0  | 609.6                         | 243.8 | 289.6  | 10,372.0 |
| 48   | PT750V       | CUMMINS     | VTA28G6      | 600 / 750              | 660 / 825      | 387.5                       | 187.8 | 220.4  | 5,766.0  | 490.0                         | 170.0 | 238.5  | 9,000.0  |
| 49   | PT750KCQP    | CUMMINS     | KTA38G2      | 600 / 750              | 660 / 825      | 431.5                       | 170.6 | 247.4  | 7,872.0  | 609.6                         | 243.8 | 289.6  | 10,372.0 |
| 50   | PT800KCQP    | CUMMINS     | KTA38G2      | 640 / 800              | 704 / 880      | 431.5                       | 170.6 | 247.4  | 7,872.0  | 609.6                         | 243.8 | 289.6  | 10,372.0 |
| 51   | PT910KCQP    | CUMMINS     | KTA38G2A     | 728 / 910              | 800 / 1000     | 435.6                       | 170.6 | 247.4  | 9,116.0  | 609.6                         | 243.8 | 289.6  | 11,616.0 |
| 52   | PT1000KCQP   | CUMMINS     | KTA38G5      | 800 / 1000             | 880 / 1100     | 427.2                       | 177.6 | 236.0  | 8,350.0  | 609.6                         | 243.8 | 289.6  | 11,616.0 |
| 53   | PT1000Q      | CUMMINS     | QST30G4      | 800 / 1000             | 880 / 1100     | 420.0                       | 203.0 | 235.0  | 8,000.0  | 609.6                         | 243.8 | 289.6  | 10,372.0 |
| 54   | PT1250KSCQP  | CUMMINS     | KTA38G9      | NA / NA                | 1000 / 1250    | 441.7                       | 204.2 | 231.5  | 9,216.0  | 609.6                         | 243.8 | 289.6  | 11,816.0 |
| 55   | PT1250KCQP   | CUMMINS     | KTAA50G3     | 1000 / 1250            | 1100 / 1375    | 498.0                       | 203.0 | 229.2  | 10,016.0 | 900.0                         | 243.8 | 289.6  | 14,000.0 |
| 56   | PT1500KCQP   | CUMMINS     | KTAA50GS8    | 1200 / 1500            | 1320 / 1650    | 520.7                       | 213.0 | 254.5  | 10,020.0 | 900.0                         | 243.8 | 289.6  | 16,000.0 |
| 57   | PT1675KCQP   | CUMMINS     | KTAA50G15A   | 1340 / 1675            | 1474 / 1842.5  | 520.7                       | 213.0 | 254.5  | 15,000.0 | 1,200.0                       | 243.8 | 289.6  | 20,000.0 |
| 58   | PT1800Q      | CUMMINS     | QSK60G3      | 1440 / 1800            | 1584 / 1980    | 570.5                       | 222.4 | 267.5  | 18,000.0 | 1,415.0                       | 320.0 | 512.0  | 512.0    |
| 59   | PT1875KCQP   | CUMMINS     | KTAA50G16A   | 1500 / 1875            | 1650 / 2062.5  | 550.0                       | 213.0 | 254.5  | 16,000.0 | 1,200.0                       | 243.8 | 289.6  | 21,000.0 |
| 60   | PT2000QCQP   | CUMMINS     | QSK50G23     | 1600 / 2000            | 1760 / 2200    | 560.0                       | 213.0 | 254.5  | 16,000.0 | 1,200.0                       | 243.8 | 289.6  | 22,000.0 |
| 61   | PT2000Q      | CUMMINS     | QSK60G4      | 1600 / 2000            | 1760 / 2200    | 579.1                       | 222.4 | 272.5  | 18,000.0 | 1,415.0                       | 320.0 | 512.0  | 28,000.0 |
| 62   | PT2500QCQP   | CUMMINS     | QSK60G23     | 2000 / 2500            | 2200 / 2750    | 579.1                       | 222.4 | 272.5  | 20,000.0 | 1,415.0                       | 320.0 | 512.0  | 30,000.0 |

# LET'S POWER YOUR NEXT PROJECT

Whether you need a generator set, data centre backup power solution, temporary power, load bank testing, marine engine support, replacement parts, filtration products, or service support, HSP Power Systems is ready to support your project.

CONTACT US:

**HSP** POWER SYSTEMS



HSP POWER SYSTEMS SDN. BHD.



<https://www.hspower.com.my>



[marketing@hspower.com.my](mailto:marketing@hspower.com.my)



## HSP HQ (PLANT A)

PMT 1287, Jalan Kilang Tebu,  
Sungai Lokan,  
13800 Butterworth, Penang, Malaysia.

Tel: +604 356 2623  
Fax: +604 356 2829



## HSP (PLANT B)

Lot 2963, MK 16, Kawasan  
Perindustrian Akku, Bagan Lallang,  
13400 Butterworth, Penang, Malaysia.

Tel: +6017 474 3668  
Fax: +604 332 5009



## HSP (PLANT C)

No 11A, Jalan Perusahaan 2,  
Kawasan Industri Batu Caves,  
68100 Batu Caves, Selangor

Tel: +603 6185 2668  
Fax: +603 6185 1168



## HSP (PLANT D)

No 15, Jalan Selatan Utama,  
Taman Perindustrian Ringan Pulau,  
81300 Skudai, Johor Bahru, Malaysia

Tel: +6017 474 3668  
Fax: 607 562 6878



## HSP (PLANT E)

No 3, Lot 3, Lorong RBF 5-1 KKIP Timur,  
Kota Kinabalu Industrial Park,  
88460 Kota Kinabalu, Sabah, Malaysia.

Tel: +6017 474 3668  
Fax: +6088 491 198